

Accessories



Type

Description

KM 381 09 720

compression rails, length 720 mm / 28.35 in


KM 381 09 1000

compression rails, length 1000 mm / 39.37 in

KM 685 05*

adapter for compression rails for different grabs

KM 685 05

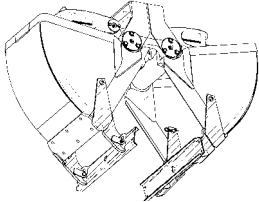

KM 680

KM 680 1t-4t*

scraper

KM 680 5t-8t*

scraper

KM 680 9t-12t*


scraper

KM 680 C12VE/18VE*

scraper for C12VE and C18VE

KM 680 C25VE*

scraper for C25VE

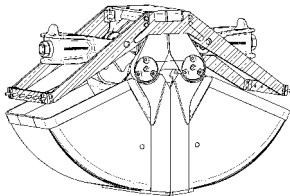

KM 681 800

bolt-on shells for R12H, volume 225 l / 0.29 c.y.

KM 681 1000

bolt-on shells for R12H, volume 275 l / 0.36 c.y.

KM 682

shell support for easy mounting of shells for R12H

KM 685 06 hook




KM 685 06 hook

welded hook

KM 685 06 hook set 2

welded hooks, set with 2 pieces

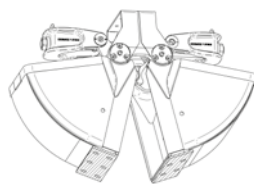


KM 685 07

KM 685 07 set*

wear plates (set)

KM 685 08

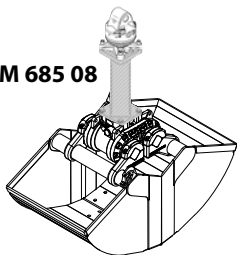

KM 685 08

extension for excavating – 450 mm / 17.72 in (60 kg / 132 lbs)

KM 685 09 E

bolt-on side plates

KM 685 10

retrofitted plate to close backside for handling of small material

KM 980-2 2t-8t

solenoid valve, up to 26 MPa (260 bar) / 3744 psi for self installation

KM 980-2 2t-8t c

solenoid valve, up to 26 MPa (260 bar) / 3744 psi incl. parts and installation

* please specify width of grab when ordering

Accessories for Cardanic Mounting of Grabs

KM 501 – Upper Suspension without Pendulum Damper



When ordering please specify excavator model

Type	Operating weight of excavator (t/lbs)	for rotator type	Upper connection (width x pin-Ø) (mm/in)
KM 501 1t-8t	1 - 8 / 2200 - 17600	KM 04 F / KM 04 F140-30V / KM 04 F140-30US	84x30 / 3.31x1.18
KM 501 6t-12t	6 - 12 / 13200 - 26400	KM 06 F140-40 / KM 07 F180-40	84x40 / 3.31x1.57
KM 501 9t-12t	9 - 12 / 19800 - 26400	KM 10 F275-50	110x50 / 4.33x1.97
KM 501 13t-25t	13 - 25 / 28600 - 55000	KM 10 F275-60	125x60 / 4.92x2.36
KM 501 19t-60t	19 - 60 / 41800 - 132000	KM 15 F340-70 / KM 15 F273-70 / integrated rotator*	180x70 / 7.09x2.76

* integrated rotation with cardanic suspension for C40/60/80H, P22V, P25VR HD, P30/40/51VHD and T30VHD

KM 511 – Upper Suspension with Pendulum Damper (can be retrofitted)



When ordering please specify excavator model

Type	Operating weight of excavator (t/lbs)	for rotator type	Upper connection (width x pin-Ø) (mm/in)
KM 511 1t-8t	1 - 8 / 2200 - 17600	KM 04 F / KM 04 F140-30V / KM 04 F140-30US	84x30 / 3.31x1.18
KM 511 6t-12t	6 - 12 / 13200 - 26400	KM 06 F140-40 / KM 07 F180-40	84x40 / 3.31x1.57
KM 511 9t-12t	9 - 12 / 19800 - 26400	KM 10 F275-50	110x50 / 4.33x1.97
KM 511 13t-25t	13 - 25 / 28600 - 55000	KM 10 F275-60	125x60 / 4.92x2.36
KM 511 19t-60t	19 - 60 / 41800 - 132000	KM 15 F340-70 / KM 15 F273-70 / integrated rotator*	180x70 / 7.09x2.76

* integrated rotation with cardanic suspension for C40/60/80H, P22V, P25VR HD, P30/40/51VHD and T30VHD

Adapter for Lehnhoff Grab Exchange System for Cardanic Mounting (without suspension)




Type	suitable for Lehnhoff quick exchange system	Operating weight of excavator (t/lbs)
SW01 cardanic	MS01	up to 2 / 4400
SW03 cardanic	MS03	up to 5 / 11000
SW08 cardanic	MS08	up to 12 / 26400
SW10 cardanic	MS10	up to 19 / 41800
SW21 cardanic	MS21	up to 28 / 61600
SW25 cardanic	MS25	up to 40 / 88000
SW40 cardanic	MS40	up to 70 / 154000


Please note: adapter for quick exchange systems from other manufacturers available

Technical Drawings

Grab with cardanic suspension

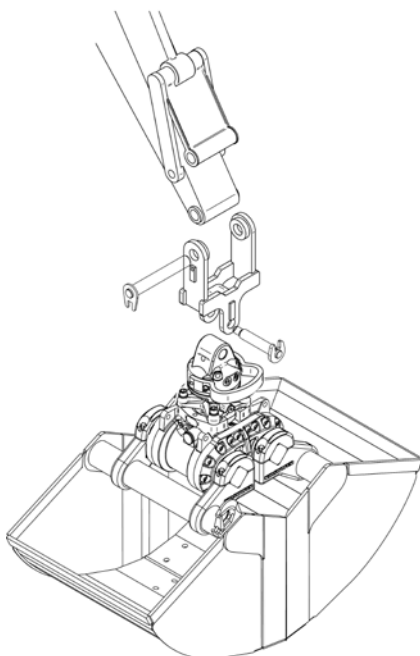


Grab with cardanic suspension and quick exchange system

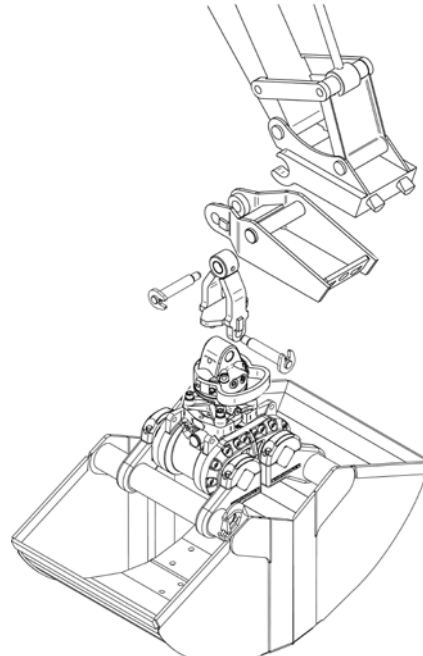

Accessories for Rigid Mounting of Grabs

Adapter for Rigid Mounting (incl. pins and mounting bolts)

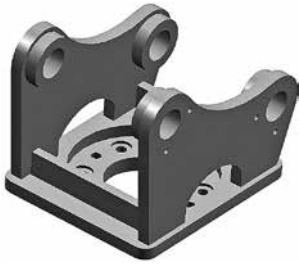


Type	Operating weight of excavator (t/lbs)
KM 690 2t	up to 2 / 4400
KM 690 8t	up to 8 / 17600
KM 690 15t	up to 15 / 33000
KM 690 20t	up to 20 / 44000
KM 690 27t	up to 27 / 59400
KM 690 32t	up to 32 / 70400
KM 690 40t	up to 40 / 88000
KM 690 50t	up to 50 / 110000
KM 690 70t	up to 70 / 154000

Adapter for Specific Solutions (incl. mounting bolts)



Type	Operating weight of excavator (t/lbs)
KM 691 2t	up to 2 / 4400
KM 691 8t	up to 8 / 17600
KM 691 15t	up to 15 / 33000
KM 691 20t	up to 20 / 44000
KM 691 27t	up to 27 / 59400

Bolt-on Adapter for Lehnhoff Grab Exchange System for Rigid Mounting (incl. mounting bolts)

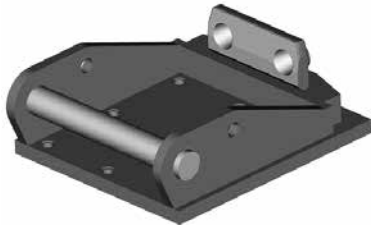

Type	suitable for Lehnhoff quick change system	Operating weight of excavator (t/lbs)
SW01 rigid	MS01	up to 2 / 4400
SW03 rigid	MS03	up to 5 / 11000
SW08 rigid	MS/HS 08	up to 12 / 26400
SW10 rigid	MS/HS 10	up to 19 / 41800
SW21 rigid	MS/HS 21	up to 28 / 61600
SW25 rigid	MS/HS 25	up to 40 / 88000
SW40 rigid	HS40	up to 70 / 154000
SW100 rigid	HS100	up to 120 / 264000

Bolt-on Adapter for Oilquick Grab Exchange System for Rigid Mounting




Type	suitable for Oilquick quick change system	Operating weight of excavator (t/lbs)
OQ45	OQ45	5 – 12 / 11000 - 26400
OQ60	OQ60	12 – 18 / 26400 - 39600
OQ65	OQ65	14 – 22 / 30800 - 48400
OQ70	OQ70	15 – 28 / 33000 - 61600
OQ70/55	OQ70/55	18 – 28 / 39600 - 61600
OQ80	OQ80	45 – 70 / 99000 - 154000

Note: Adapters for quick-exchange-systems from other manufacturers also available

Technical Drawings

Grab with adapter for rigid mounting

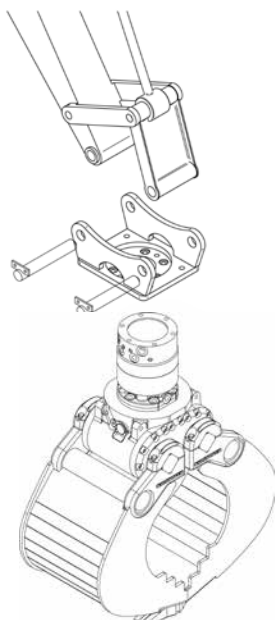

Grab with adapter for quick exchange system for rigid mounting

